


GMPU60 60W Wall mount interchangeable series

(FOR MEDICAL)

DoE(VI)&EU ErP/CoC(5)

UNIT:mm

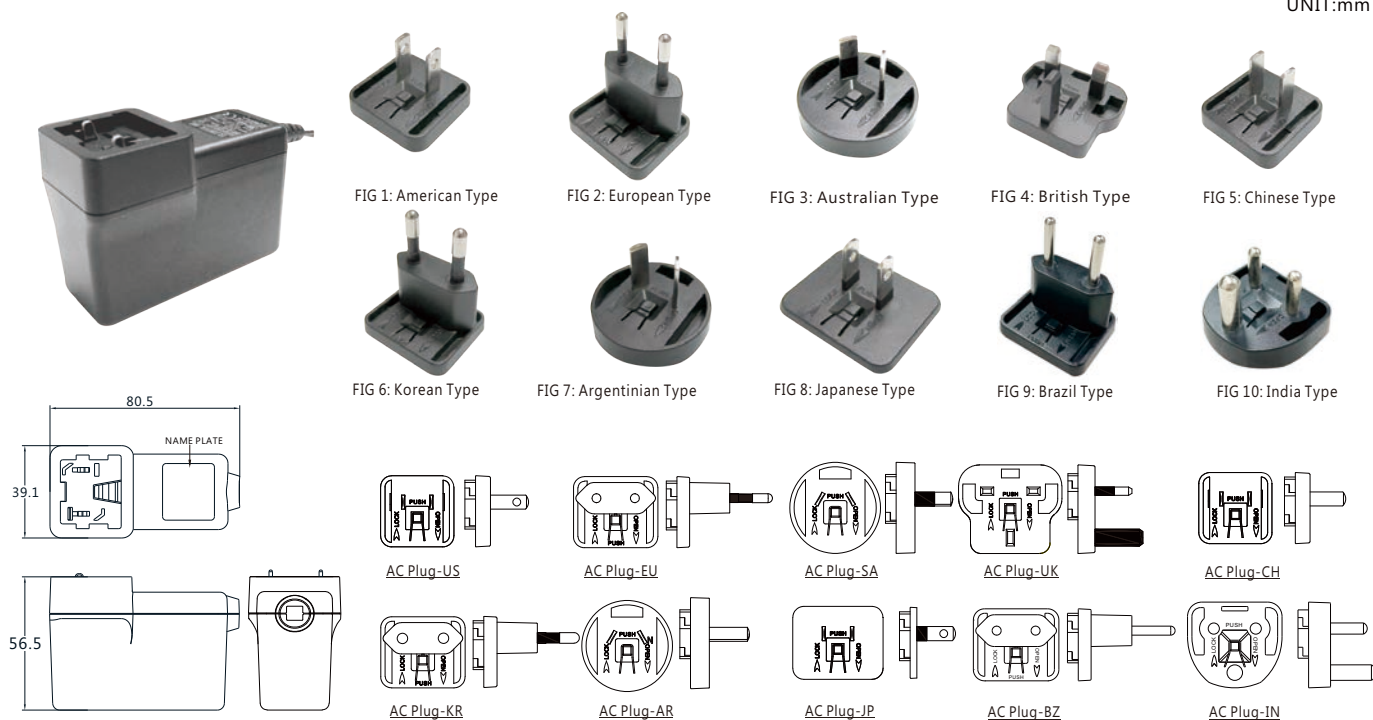

■Safety agency approvals:



■Specifications:

Model No.	GMPU60
AC input range	100~240VAC; 47~63Hz; 1.5~0.8A
Leakage current	0.1mA Max.@ 240VAC/50Hz
Operating temperature	-20°C to ~+70°C(safety approval 0°C to 40°C, >40°C please contact the sales request derating curve.)
Withstand voltage	5656VDC from input to output
EMC	(A)CE:EN60601-1-2 (B)47 CFR FCC Part 15 Subpart B, 47 CFR FCC Part 18.
Safety	(A)UL/cUL (B)TUV/GS (C) TUV/PSE (D)CB (IEC60950-1)
Warranty	2 years

■ **X = UI:** (American type FIG 1) or **EI:** (European type FIG 2) or **SAI:** (2pin Australian type FIG 3)
or **BSI:** (British type FIG 4) or **CHI:** (Chinese type FIG 5) or **KRI:** (Korean type FIG 6)
or **ARI:** (Argentinian type FIG 7) or **JPI:** (Japanese type FIG 8) or **BZI:** (Brazil type FIG 9)
or **INI:** (India type FIG 10)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple.(mV) max.	Line Regulation(%)	Load Regulation(%)	Avg.Eff.(%) DoE(VI)_CoC(5)	No load Power Consumption(W)	Measured at the output of
GMPU60X-1	5~6	6.00~5.00	30	120	±1	±5	>85.07	<0.1	5
GMPU60X-1-1	6~8	6.00~5.63	45.04	120	±1	±5	>87.73	<0.1	7.5
GMPU60X-2	8~11	5.63~5.00	55	120	±1	±5	>88	<0.21	9
GMPU60X-3	11~13	5.00~4.62	60	100	±1	±3	>88	<0.21	12
GMPU60X-4	13~16	4.62~3.75	60	150	±1	±3	>88	<0.21	15
GMPU60X-5	16~21	3.75~2.86	60.06	150	±1	±2	>88	<0.21	18
GMPU60X-6	21~27	2.86~2.23	60.21	150	±1	±2	>88	<0.21	24
GMPU60X-7	27~33	2.23~1.82	60.06	150	±1	±2	>88	<0.21	28
GMPU60X-8	33~58	1.82~1.04	60.32	250	±1	±2	>88	<0.21	48

Note:

1.Weight: Approx 180~200gs

2.Optional output connectors (See appendix A)

3.Avg. Eff.(%): Averages the efficiency at 25, 50, 75, and 100 % of max. rated output current.

4.Standard Output cable: **5~21V:** UL2468, 16AWG, 1M ; **21~48V:** UL2468, 18AWG, 5FT