

GPSU12-USB 12W USB Charger interchangeable series DoE(VI) & EU ErP/CoC(5)

UNIT:mm



FIG 1: American Type



FIG 2: European Type



FIG 3: Australian Type



FIG 4: British Type



FIG 5: Chinese Type



FIG 6: Korean Type



FIG 7: Argentinian Type




FIG 8: Japanese Type




FIG 9: Brazil Type




FIG 10: India Type

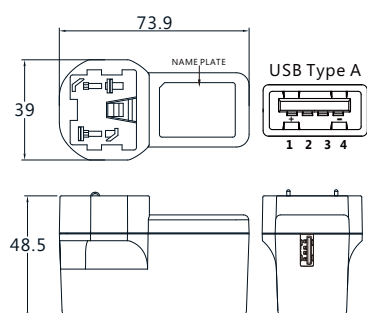


AC Plug-US




AC Plug-EU




AC Plug-SA



AC Plug-UK




AC Plug-CH




AC Plug-KR




AC Plug-AR



AC Plug-JP



AC Plug-BZ



AC Plug-IN

■Safety agency approvals:



OR



FCCECBLPS

■Specifications:

Model No.	GPSU12-USB
AC input range	100~240VAC; 47~63Hz; 0.4A
Leakage current	0.25mA Max.@ 240VAC/50Hz
Operating temperature	-20°C to ~+70°C(safety approval 0°C to 40°C, >40°C please contact the sales request derating curve.)
Withstand voltage	4242VDC from input to output
EMC	(A)CE EN 55032,EN 55035 (B)FCC 47 CFR Part 15 Subpart B
Safety	(A) UL/cUL (B) TUV/GS (C) TUV/PSE (D) CB
Warranty	1 year

■ **X** = **UI**: (American type FIG 1) or **BSI**: (British type FIG 4) or **ARI**: (Argentinian type FIG 7) or **INI**: (India type FIG 10) or **EI**: (European type FIG 2) or **CHI**: (Chinese type FIG 5) or **JPI**: (Japanese type FIG 8) or **SAI**: (2pin Australian type FIG 3) or **KRI**: (Korean type FIG 6) or **BZI**: (Brazil type FIG 9)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple.(mV) max.	Line Regulation(%)	Load Regulation(%)	Avg.Eff.(%) DoE(VI)_CoC(5)	No load Power Consumption(W)	Measured at the output of
GPSU12X-1-USB	5	2.40	12	50	±1	±5	>79.94	<0.1	5

Note:

1.Weight: Approx 100~120gs

2.Avg. Eff.(%): Averages the efficiency at 25, 50, 75, and 100 % of max. rated output current.