

APSU15-USB 15W USB Charger interchangeable series DoE(VI) & EU ErP/CoC(5)

UNIT:mm



FIG 1: American Type



FIG 2: European Type



FIG 3: Australian Type



FIG 4: British Type



FIG 5: Chinese Type



FIG 6: Korean Type



FIG 7: Argentinian Type





FIG 8: Japanese Type




FIG 9: Brazil Type




FIG 10: India Type

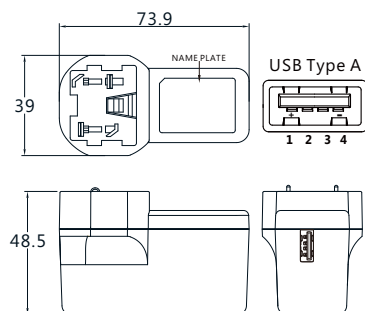


AC Plug-US




AC Plug-EU




AC Plug-SA




AC Plug-UK




AC Plug-CH




AC Plug-KR



AC Plug-AR



AC Plug-JP




AC Plug-BZ



AC Plug-IN

■Safety agency approvals:



FCCECB LPS

■Specifications:

Model No.	APSU15-USB
AC input range	100~240VAC; 47~63Hz; 0.4A
Leakage current	0.25mA Max.@ 240VAC/50Hz
Operating temperature	-20°C to ~+70°C(safety approval 0°C to 40°C, >40°C please contact the sales request derating curve.)
Withstand voltage	4242VDC from input to output
EMC	(A)CE EN 55032,EN 55035 (B)FCC 47 CFR Part 15 Subpart B
Safety	(A) UL/cUL (B) TUV/GS (C) TUV/PSE (D) CB
Warranty	1 year

■ **X= UI:** (American type FIG 1) or **EI:** (European type FIG 2) or **SAI:** (2pin Australian type FIG 3)
or **BSI:** (British type FIG 4) or **CHI:** (Chinese type FIG 5) or **KRI:** (Korean type FIG 6)
or **ARI:** (Argentinian type FIG 7) or **JPI:** (Japanese type FIG 8) or **BZI:** (Brazil type FIG 9)
or **INI:** (India type FIG 10)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple.(mV) max.	Line Regulation(%)	Load Regulation(%)	Avg.Eff.(%) DoE(VI)_CoC(5)	No load Power Consumption(W)	Measured at the output of
APSU15X-1-USB	5	2.70	13.5	50	± 0.5	± 5	>79.94	<0.1	5

Note:

1.Weight: Approx 120~140gs

2.Avg. Eff.(%): Averages the efficiency at 25, 50, 75, and 100 % of max. rated output current.