



FIG 1: American Type



FIG 2: European Type



FIG 3: Australian Type



FIG 4: British Type



FIG 5: Chinese Type



FIG 6: Korean Type



FIG 7: Argentinian Type




FIG 8: Japanese Type



FIG 9: Brazil Type



FIG 10: India Type

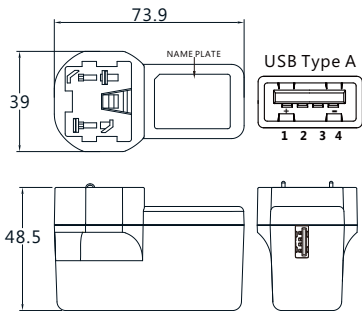

■Safety agency approvals:

ES/EN60601-1-11



■Specifications:

Model No.	GMPU06-USB
AC input range	100~240VAC; 47~63Hz; 0.18~0.09A
Leakage current	0.1mA Max.@ 240VAC/50Hz
Operating temperature	-20°C to ~+70°C(safety approval 0°C to 40°C, >40°C please contact the sales request derating curve.)
Withstand voltage	5656VDC from input to output
EMC	(A)CE: EN60601-1-2 (B)47 CFR FCC Part 15 Subpart B, 47 CFR FCC Part 18.
Safety	(A)UL/cUL (B)TUV/GS (C)TUV/PSE
Warranty	2 years

■ **X** = **UI**: (American type FIG 1) or **EI**: (European type FIG 2) or **SAI**: (2pin Australian type FIG 3)
or **BSI**: (British type FIG 4) or **CHI**: (Chinese type FIG 5) or **KRI**: (Korean type FIG 6)
or **ARI**: (Argentinian type FIG 7) or **JPI**: (Japanese type FIG 8) or **BZI**: (Brazil type FIG 9)
or **INI**: (India type FIG 10)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple.(mV) max.	Line Regulation(%)	Load Regulation(%)	Avg.Eff.(%) DoE(V)_CoC(4)	No load Power Consumption(W)	Measured at the output of
GMPU06X-1-USB	5~6	1.20~1.00	6	80	±1	±5	>69.54	<0.3	5
GMPU06X-11-USB	5	1	5	80	±1	±5	>68.2	<0.3	5
GMPU06X-1-1-USB	6~8	1.00~0.75	6	80	±1	±5	>74	<0.3	7.5
GMPU06X-2-USB	8~11	0.75~0.55	6	80	±1	±5	>74	<0.3	9
GMPU06X-3-USB	11~13	0.55~0.46	6	120	±1	±5	>74	<0.3	12
GMPU06X-4-USB	13~16	0.46~0.38	6	150	±1	±5	>74	<0.3	15
GMPU06X-5-USB	16~21	0.38~0.29	6	180	±1	±5	>74	<0.3	18
GMPU06X-6-USB	21~24	0.29~0.26	6	200	±1	±4	>74	<0.3	24

Note:

1.Weight: Approx 90~110gs

2.Avg. Eff.(%): Averages the efficiency at 25, 50, 75, and 100 % of max. rated output current.